

RE-Flex DRASUTEN[®]

**Extensible connecting duct
with metal sleeves**



Uses

Handy connection between ventilation unit and ducting. Swedish Type Approval Certificate No. 3439/83.

Design

Drasuten is made of corrugated, seamed aluminium band and can easily be extended, bent and compressed again. Similar construction as RE-Flex Compact, but Drasuten is fitted with a metal sleeve at both ends. Can also be made with nipple upon request.

Max. temperature

+200°C.

Standard length

0,25 m extensible to 0,5 m.

0,35 m extensible to 1,0 m.

0,55 m extensible to 1,5 m.

Inner diameter (mm)	Inner bending radius (mm)
80	48
100	60
125	75
160	96
200	160
250	200
315	250

When ordering, please state:

Art. No. Drasuten - 125


Product _____

Dimension _____

How to install




1. Fit



2. Extend




3. Adjust



4. Connect

Pressure drop diagram, straight ducts

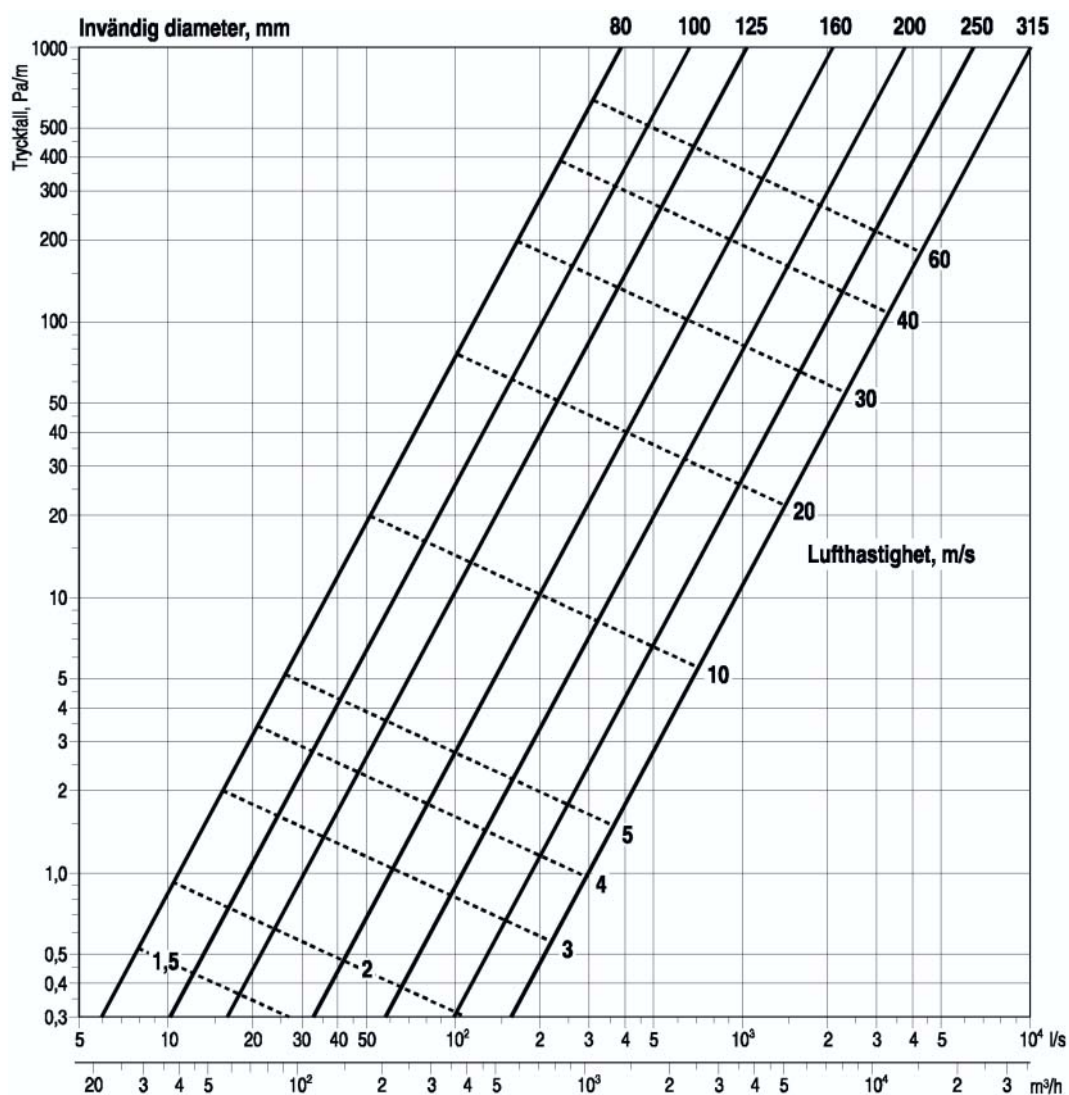

Invändig diameter, mm
= Inner diameter, mm

Tryckfall, Pa/m
= Pressure drop, Pa/m

Lufthastighet, m/s
= Air speed, m/s