

KF-2000

Flexible kitchen and ventilation duct



Uses

KF-2000 is approved as a connection between kitchen fan/stove hood and kitchen flue, and also between ventilation unit and duct. Approved acc. to Swedish Type Approval No. 198603.

Design

PVC coated glass fibre fabric with steel wire helix. The helix is fully embedded, making the inside smooth.

Colour: grey.

Properties

The hose has good resistance to chemicals and humidity. It is lightweight and axially compressible.

KF-2000 complies with the following Swedish demands:

- 2§ of the Statute Book of Sweden (1994:847)
- Boverket's (the Building Institute's) regulations for construction (BFS 1993:57), BBR 1999 (BFS 1998:38).
- protection against the spreading of fire within fire compartment, (5:515, last paragraph).
- material difficult to ignite (5:221).
- tightness class C acc. to SS 827209

Temperature range

-5°C to +90°C

Accessories

Hose clamp suitable for ventilation: SBF.

For connection to kitchen fan: SKF clamp.

Inner diameter mm	Weight (kg) /6 m
82	0,9
102	1,1
127	1,5
152	1,8
160	1,9
203	2,6
254	3,5
318	4,4
408	5,6
510	7,0
610	8,4


When ordering, please state:

Art. No. KF-2000 - 127

Product _____

Dimension _____

Pressure drop diagram, straight ducts

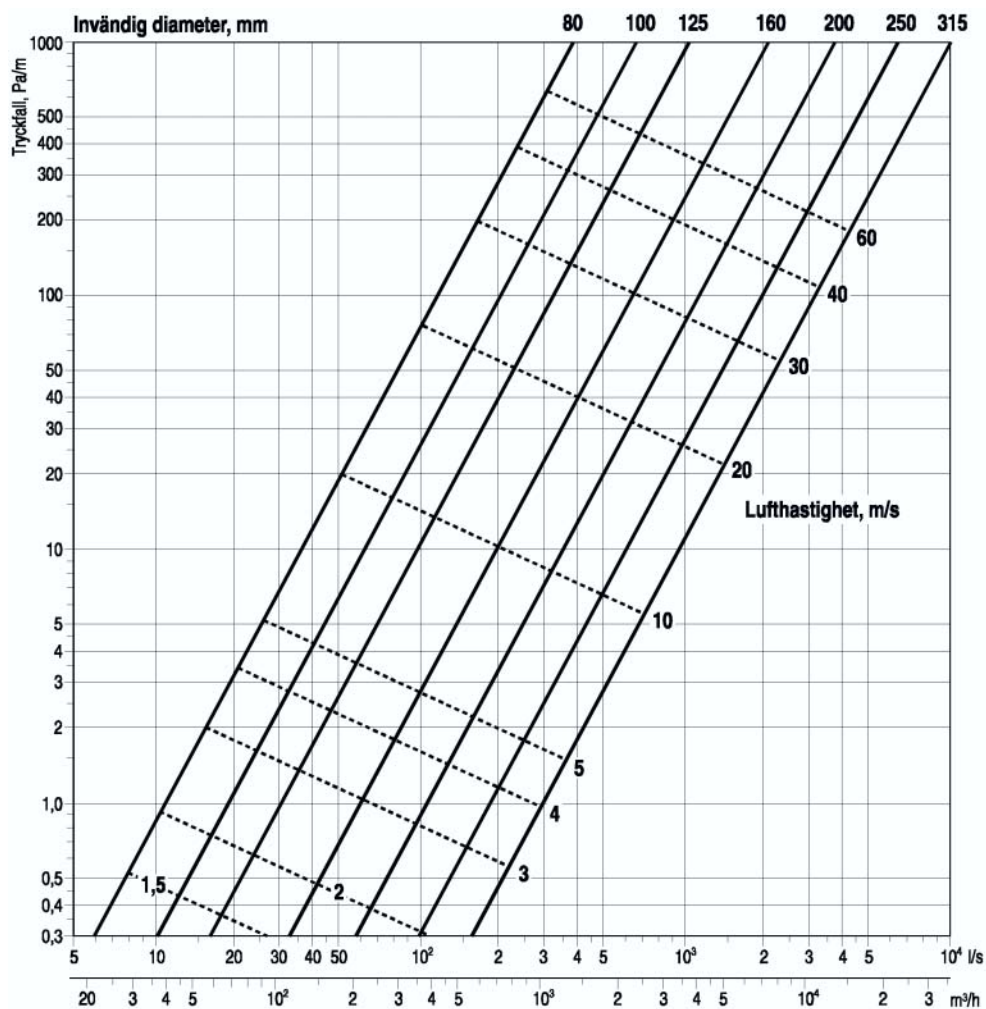

Invändig diameter, mm =
inner diameter, mm

Tryckfall, Pa/m =
pressure drop, Pa/m

Lufthastighet, m/s =
air speed, m/s